


## M10 TOPCON MONO

**PW xxx-N144M10**


**555-585W**

- Bifacial Transparent
- Double glass
- Silver frame
- Black frame
- Full black

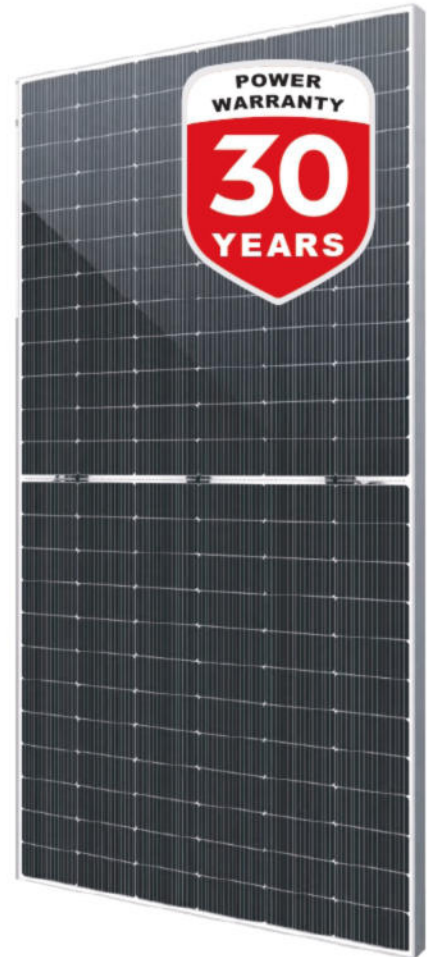

25 Yr quality guarantee | 30 Yr power warranty

■ Powerlinx module (Additional value from 30-year warranty)  
 ■ Common module

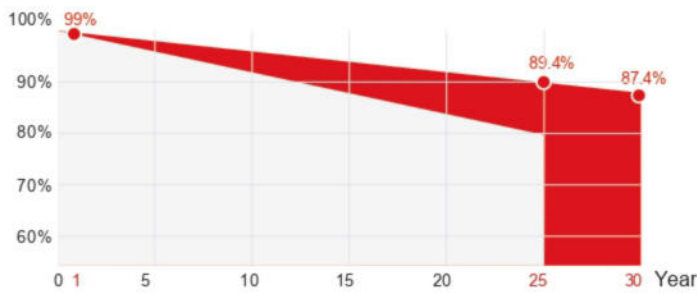

Powerlinx Standard tiered warranty



### WARRANTY & GUARANTEE

Linear output power guarantee  
 25 years: 89.4% power output  
 30 years: 87.4% power output



### WITHSTAND STRONG

Snow load 5400Pa  
 Wind load 2400Pa



### PID RESISTANCE

Power positive tolerance : 0~+3%.  
 The attenuation probability of PID phenomenon is minimized through battery production technology optimization and material control



### R&D AND PRODUCTION

Advanced production line. Bifaciality > 80%, effectively improves backside power generation. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



### HIGH EFFICIENCY

N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 22.64%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

## Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m<sup>2</sup> .Cells Temperature25°C)

Typical type	550W	555W	560W	565W	570W	575W	580W	585W
Max power(Pmax)	575	575	575	575	575	575	580	585
Max power voltage(Vmp)	41.73	41.86	41.99	42.13	42.26	42.41	42.56	42.72
Max power current(Imp)	13.18	13.26	13.34	13.41	13.49	13.56	13.63	13.7
Open circuit voltage(Voc)	50.56	50.7	50.84	50.98	51.13	51.28	51.43	51.58
Short circuit current(Isc)	13.95	14.01	14.07	14.13	14.2	14.27	14.34	14.41
Module Efficiency(%)	21.28	21.48	21.67	21.86	22.06	22.25	22.44	22.64
Max system voltage	DC 1500V (TUV.UL)							
Maximum Series Fuse Rating	30A							

### Electrical Characteristics with 15% Rear Side Power Gain


Front power Pmax/W	555W	555W	560W	565W	570W	575W	580W	585W
Total power Pmax/W	632.5	638.25	644	649.75	655.5	661.25	667	672.75
VmpZV(Total)	41.73	41.86	41.99	42.13	42.26	42.41	42.56	42.72
ImpZA(Total)	15.16	15.25	15.34	15.42	15.51	15.59	15.67	15.75
VocZV(Total)	50.56	50.7	50.84	50.98	51.13	51.28	51.43	51.58
IscZA(Total)	16.04	16.11	16.18	16.25	16.33	16.41	16.49	16.57

### Electrical parameters at NMOT test conditions


(Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5, Wind Speed 1 m/s)

Typical type	555W	555W	560W	565W	570W	575W	580W	585W
Max power(Pmax)	411	417	421	425	429	433	436.7	437.3
Max power voltage(Vmp)	38.9	39.3	39.5	39.7	39.7	39.9	40.1	39.9
Max power current(Imp)	10.56	10.62	10.67	10.72	10.79	10.85	10.90	10.96
Open circuit voltage(Voc)	47.4	47.7	47.9	48.1	48.2	48.4	48.5	48.3
Short circuit current(Isc)	11.24	11.29	11.34	11.39	11.44	11.50	11.56	11.61

### DIMENSIONS AND STRUCTURE

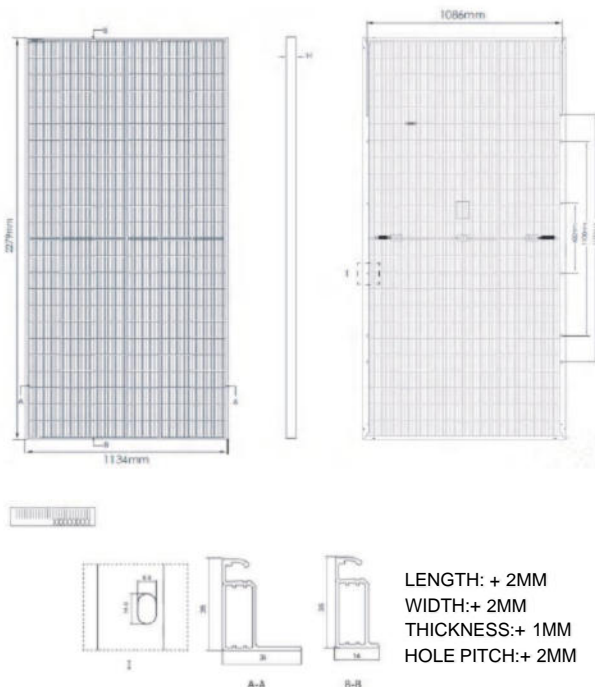

### I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

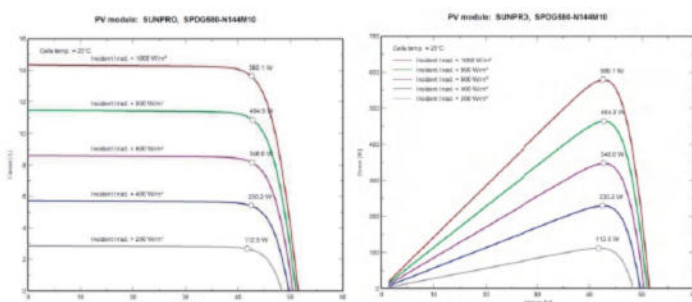

### Mechanical Data

Dimensions	2279x1134x35mm
Weight	34kg
Glass	(F) 2.0mm ultra clear embossed double layer colorless glass (B) 2.0mm semi-tempered glass
Output cables	4mm <sup>2</sup> , symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	N type Mono-Crystalline , 182x91mm
Number of cells	144cells ( Half-Cell )

### Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.046%/ °C
Temp.Coeff.of Voc(TK Voc)	-0.25%/ °C
Temp.Coeff.of Pmax(TK Pmax)	-0.30%/ °C
Operating temperature	-40~+85°C
Normal operating cell temperature	45±2°C

### Packing Configuration

Container	40'GP
Pieces per pallet	62
Pallets per container	10
Pieces per container	620

### Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TÜV, CE, CEC, UL, WEEE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP 68
Warranties	25 years product warranty and 30 years 87.4% of power