


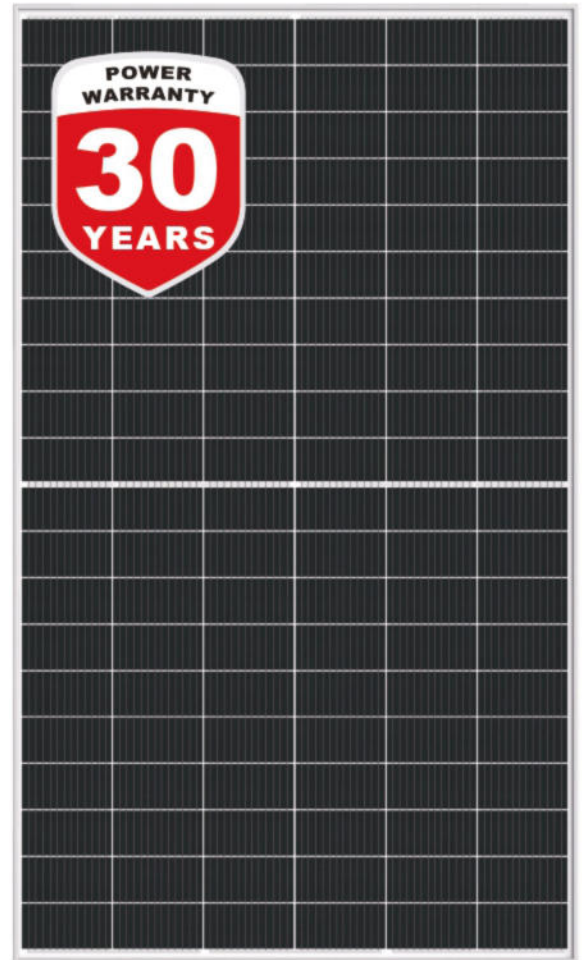
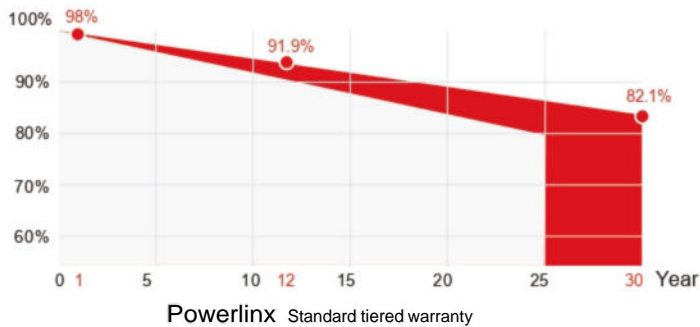
## M12 HIEFF TWIN MONO

### PW XXX-120M12 580~605W

- Double glass
- Silver frame
- Black frame
- Full black

15 Yr quality guarantee | 30 Yr power warranty

 **Powerlinx** (Additional value from 30-year warranty)  
 Industry Standard



#### WARRANTY & GUARANTEE

Linear output power guarantee  
 12 years: 91.9% power output  
 30 years: 82.1% power output

#### WITHSTAND STRONG

Snow load 5400Pa  
 Wind bad 2400Pa

#### TWO-SIDED BENEFITS

High efficiency solar cells.  
 Effective working area of both sides >75%, with significant power increase. Capture more sunlight and turn it into electricity

#### R&D AND PRODUCTION

Advanced production line. The hading solar cell cutting process and multi busbar design with SUNPRO Technology.

#### HIGH EFFICIENCY

Efficiency can reach 21.38%. Excellent bw light performance. Higher power output under the conditbns of haze, overcast, etc.

## Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m2 ,Cells Temperature25°C)

Typical type	580W	585W	590W	595W	600W	605W
Max power(Pmax)	580	585	590	595	600	605
Max power voltage(Vmp)	33.60	33.80	34.00	34.20	34.40	34.60
Max power current(Imp)	17.27	17.31	17.35	17.40	17.45	17.49
Open circuit voltage(Voc)	40.70	40.90	41.10	41.30	41.50	41.70
Short circuit current(Isc)	18.32	18.37	18.42	18.47	18.52	18.57
Module Efficiency(%)	20.49	20.67	20.85	21.02	21.20	21.38
Max system voltage	DC 1500V(TUV,UL)					
Maximum Series Fuse Rating	35A(TUV) / 40A(UL)					


### Electrical parameters at NMOT test conditions (Irradiance 800W/m2,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s)

Typical type	580W	585W	590W	595W	600W	605W
Max power(Pmax)	433	437	441	445	449	453
Max power voltage(Vmp)	31.40	31.50	31.70	31.80	32.10	32.20
Max power current(Imp)	13.79	13.88	13.92	13.97	14.02	14.06
Open circuit voltage(Voc)	38.30	38.40	38.60	38.80	39.00	39.20
Short circuit current(Isc)	14.74	14.78	14.82	14.86	14.90	14.94


### Electrical Characteristics with 15% Rear Side Power Gain

Front power Pmax/W	580W	585W	590W	595W	600W	605W
Total power Pmax/W	667	672.75	678.5	684.25	690	695.75
VmpV(Total)	33.60	33.80	34.00	34.20	34.40	34.60
ImpZA(Total)	19.85	19.90	19.96	20.01	20.06	20.11
VocV(Total)	40.70	40.90	41.10	41.30	41.50	41.70
IscA(Total)	21.07	21.13	21.18	21.24	21.30	21.35

### DIMENSIONS AND STRUCTURE

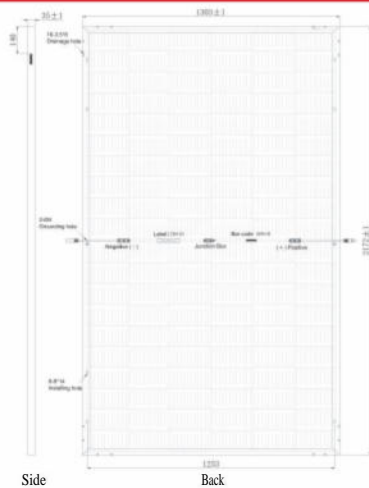

### I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

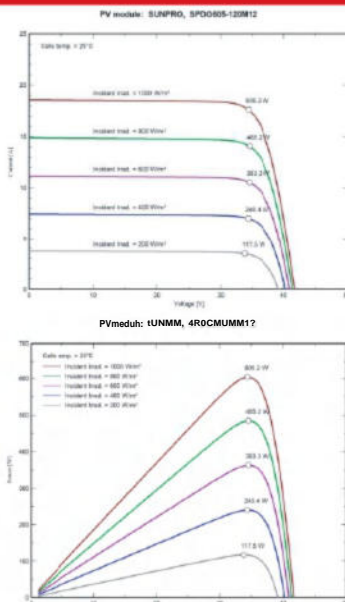

### Mechanical Data

Dimensions	2172x1303x35mm
Weight	35 kg
Glass	(F) 2.0mm ultra clear embossed semi-tempered coated glass (B) 2.0mm semi-tempered glass
Output cables	4mm2, symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline PERC, 210x105mm
Number of cells	120 cells ( Half-Cell )

### Temperature Characteristics

Temp.Coeff of Isc(TK Isc)	0.05%/ °C
Temp Coeff of Voc(TK Voc)	-0.27%/°C
Temp Coeff of Pmax(TK Pmax)	-0.34%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	44±2C

### Packing Configuration

Container	40'HQ
Pieces per pallet	31
Pallets per container	17
Pieces per container	527

### Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, CE, UL, WEEE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP 68
Warranties	15 years product warranty and 30 years 82.1% of power